


# VLS1 UHV Compatible Limit Switch


Ultra High Vacuum Compatible Limit Switch

The VLS1 limit switch is used for repeatable limit detection for in-vacuum motion systems. The switch is normally-closed (NC) and can be connected directly to an SMD3 stepper motor drive.

- UHV-compatible material construction
- Suitable for use to  $1.3 \times 10^{-10}$  mBar ( $1 \times 10^{-10}$  Torr)
- Repeatability:  $\pm <1\mu\text{m}$
- Overtravel: 2 mm
- Switching current: 50 mA
- Switching voltage: 30 Vdc
- High temperature - bakeable to 250°C
- Minimum temperature: -65°C
- 22 AWG polyimide insulated wires
- 3/8-24 UNF external thread with 2 matching nuts

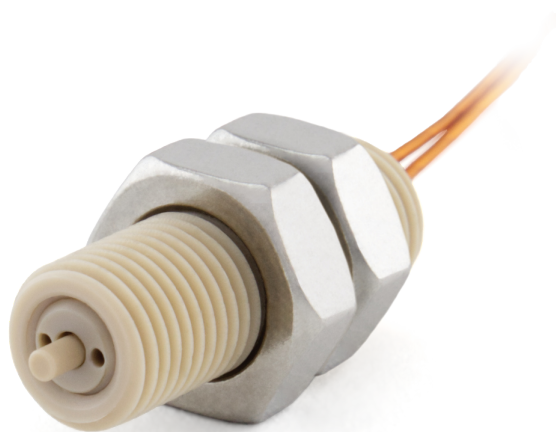

## DIMENSIONS

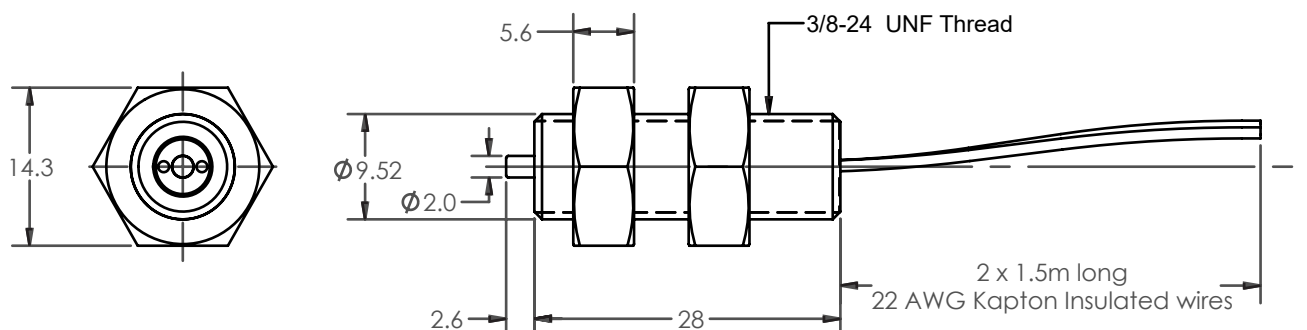

## ORDERING INFORMATION

Order Code	
VLS1	UHV Compatible Limit Switch

Related Products	
VSM17-X-xxx	Translation Stage, 5 $\mu\text{m}$ (xxx = travel in mm)
VSM17-Z-xxx	Vertical Translation Stage, 1 $\mu\text{m}$ (xxx = travel in mm)
VSM17-R-xxx	Rotation Stage (xxx steps per full rotation)
VSM17-G-xxx	Goniometer Stage (xxx mm to rotation centre)



Arun Microelectronics Ltd.  
Unit 2, Bury Mill Farm  
Bury Gate  
PULBOROUGH  
RH20 1NN  
United Kingdom

Tel: +44 (0)1903 884141  
Email: sales@arunmicro.com

AML pursues a policy of continuous improvement and reserves the right to make detail changes to specifications without consultation. E and OE.